


H 5000

powered by **HONDA GX270**

Model H5000 Compact



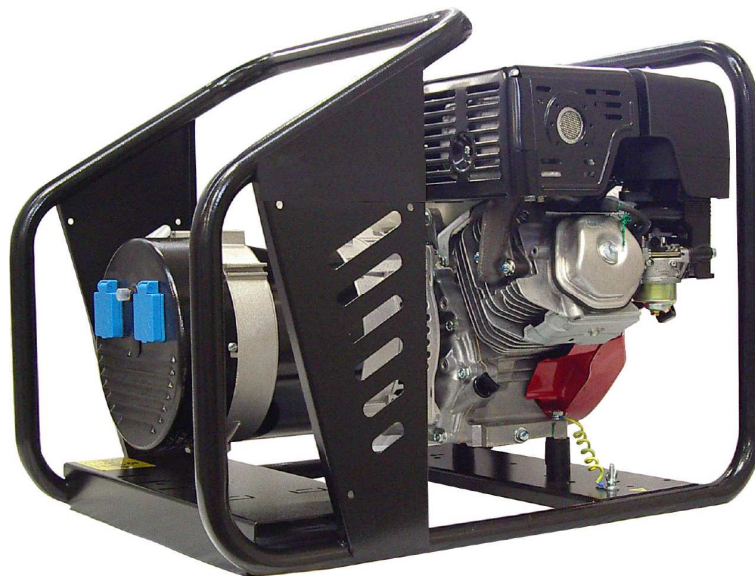

1. General Details

Frequency	50 Hz	
Voltage	230 V	
Max Power	4,5	KVA
Continuous power	4,1	KVA
Power factor cos ϕ	0,8	
Max Power	3,6	KWe
Continuous power	3,3	KWe

2. Petrol driven engine

Make and model	HONDA	GX270
rpm	3000	
Max power at 3600 rpm	9	HP
Cooling system	Air	
Cylinders	1	
Displacement (cm ³)	270	

3. Alternator						
Make and model	MECCALTE	S16W-130				
Max power	6,25	KVA				
Continuous power	5,7	KVA				
4. Starting system						
Recoil type						
5. Standard Equipment						
✓ Protection Frame	✓ Air filter					
✓ Vibration dampers	✓ Fuel tank					
✓ Low oil level protection	✓ Output sockets with protection					
✓ Exhaust gas silencer	✓ Electric panel model QM 115					
6. Electric Panels						
QM 115 STANDARD						
	✓ 16A Single-phase socket 3P					
	✓ 16A Single-phase Shucko sockets 3P					
	✓ Thermal shut off					
7. Logistic Information						
	Model	Fuel tank (litres)	Weight (Kgs)	Dimensions (cm)		
				L	W	H
	H5000 compact	6	62	78	52	56
8. Fuel consumption						
litres/hour at 75% load		1,5	approx			
9. Marking						
Label showing the general data of the genset (voltage, power, frequency). engine model with serial number, alternator model.						
TECNOGEN LOGO						
10. Operating manuals						
English. Other languages available on request.						