



Order code: INTELIPRO

## Protection Relay for Parallel Applications

# Datasheet

### Product description

InteliPro is highly flexible protection relay for grid connected applications like generator sets, renewable energy sources, cogeneration, micro turbines, etc.


### Key functions

- ▶ Voltage, frequency and current based protections for on-grid distributed power generation

### Key features

- ▶ True RMS measurement
- ▶ 3-phase voltage and current measurement
- ▶ Automatic fault reset with adjustable time delay
- ▶ Two stage protection settings
- ▶ Optional functions for extended protection
- ▶ Free assignment of 8 Binary inputs, 9 Binary outputs and 3 Analog inputs
- ▶ Full and easy configuration through the front panel or LiteEdit PC software
- ▶ Expandable extensions and communication modules
- ▶ Remote access
- ▶ 3 level password protection
- ▶ Event history log

### Application overview

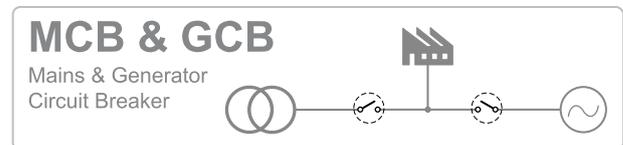

## Technical data

### Power Supply

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Power supply range                | 8 - 36 VDC                            |
| Power supply drop-out immunity    | 50 ms (from min. 10 V)                |
| Backup battery type               | approx. 200 mA / 8 V;<br>50 mA / 36 V |
| Backup battery type               | CR 1225                               |
| Estimated backup battery lifetime | 10 years                              |

### Operating conditions

|                                 |   |
|---------------------------------|---|
| Operating temperature           | -20-70 °C                                 |
| Operating humidity              | 95% non-condensing<br>(IEC/EN 60068-2-30) |
| Protection degree (front panel) | IP65                                      |
| Vibration                       | 5-25 Hz, +/- 1,6 mm<br>25-100 Hz, a = 4 g |
| Shocks                          | a <sub>max</sub> 200 m/s <sup>2</sup>     |
| Storage temperature             | -30-80 °C                                 |

### Mains measurement

|                       |   |
|-----------------------|---|
| Measurement inputs    | 3 phase mains voltage<br>3 phase mains current  |
| Measurement type      | True RMS  |
| Voltage range         | 480 V Ph-Ph (277 V Ph-N)  |
| Max. measured voltage | 340 V Ph-N  |
| Min. measured voltage | 30 V Ph-N   |
| Voltage accuracy      | 1% from the range at<br>20°C and 50 or 60 Hz;<br>1,5% on the complete<br>frequency and<br>temperature range |
| Current range         | 5 A   |
| Max. measured current | 9 A   |
| Max. allowed current  | 12 A continuous, 50 A/1 s   |
| Current accuracy      | 2% from the range at CT<br>Ratio = 50 A / 5 A or higher   |
| CT input burden       | < 0.5 VA  |
| Frequency range       | 30 - 70 Hz, measured from<br>L3   |
| Frequency accuracy    | 0.05 Hz   |

### Binary inputs

|                       |   |
|-----------------------|---|
| Number                | 9 non-isolated                                  |
| Input resistance      | 4,2 kΩ  |
| Close/Open indication | 0-2 V DC close contact<br>> 4 V DC open contact |

### Binary outputs

|              |  |
|--------------|--|
| Number       | 8 non-isolated   |
| Max. current | 500mA (suppression diodes<br>required for inductive loads) |
| Switching to | negative supply terminal                                   |

### Analog inputs

|                        |  |
|------------------------|--|
| Number                 | 3 non-isolated   |
| Electrical range       | 0 - 2500 Ω   |
| Resolution             | 10 bits, 4 digits  |
| Supported sensor types | <b>Predefined:</b> VDO 10 Bar, VDO<br>Temperature, VDO Fuel level<br><b>User defined:</b> 10 points non-linear<br>sensors can be defined by the user |
| Precision              | 1% from the range  |


### Communication

|      |  |
|------|--|
| CAN1 | External modules 250 kbps, max 200 m<br>Isolated                           |
| CAN2 | Intercontroller and comm extensions 250/50<br>kbps, max 200/800 m Isolated |

### Relay card CT2-REL2

|                              |                                |
|------------------------------|--------------------------------|
| Relay Contacts               |                                |
| Number of relay outputs      | 2                              |
| Type                         | Dry contacts                   |
| Operating voltage            | 250 VAC                        |
| Max switched voltage/current | 250 V/10 A                     |
| Current measurement inputs   | 2 x 1ph current<br>measurement |
| Measurement type             | True RMS                       |
| Number of current inputs     | 2                              |
| Input 1 (CT k1, I1):         |                                |
| Current range                | 50 mA                          |
| Max. allowed current         | 120 mA                         |
| Current accuracy             | 2% from the range              |
| Input 2 (CT k2, I2):         |                                |
| Current range                | 5 A                            |
| Max. measured current        | 9 A                            |
| Max. allowed current         | 12 A continuous, 50 A/1 s      |
| Current accuracy             | 2% from the range              |
| CT input burden              | <0.5 VA                        |


## Dimensions, terminals, mounting and EMC

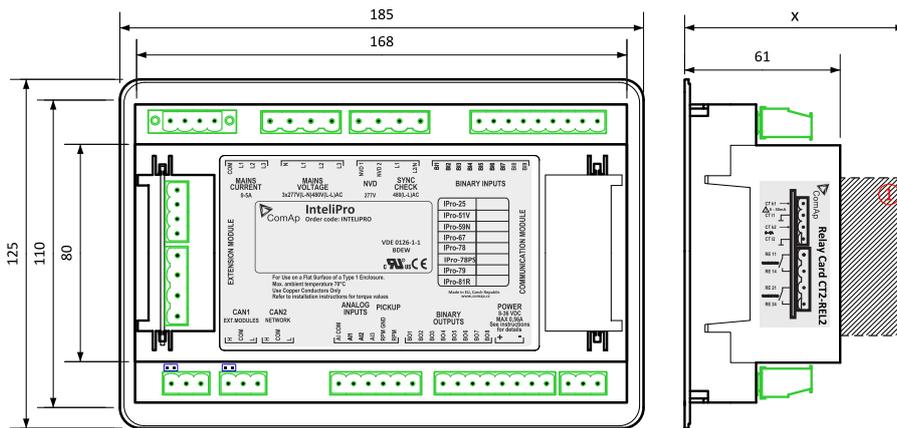

① Plug-in module

**Note:** Dimension x depends on plug-in module

### Panel door mounting

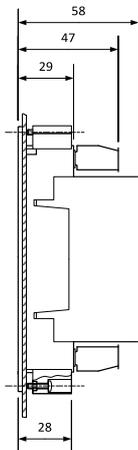

### Overview of parameter x

| Plug-in module  | Parameter x [mm]         |
|-----------------|--------------------------|
| IC-NT-CT-BIO7   | 76                       |
| CT2-REL2        | 80                       |
| IL-NT-RS232     | 113                      |
| IL-NT-RS232-485 | 115 @ RS232 / 74 @ RS485 |
| IL-NT-S-USB     | 128                      |
| IB-Lite         | 108                      |
| IL-NT-GPRS      | 122                      |

**Note:** IntelliPro can be mounted into panel doors as a standalone unit using provided plastic holders. The cut-out for the unit should be 1mm wider than the unit on each side (i.e. cut-out dimensions 175x115mm).

## EMC

|   |   |
|---|---|
| Electrical disturbance test (1MHz burst immunity)                               | IEC 60255-22-1; IEC 61000-4-18; IEEE C37.90.1 |
| Electrostatic discharge tests   | IEC 60255-22-2; IEC 61000-4-2                 |
| Radiated electromagnetic field immunity test                                    | IEC 60255-22-3; IEC 61000-4-3; IEEE C37.90.2  |
| Electrical fast transient/burst immunity test                                   | IEC 60255-22-4; IEC 61000-4-4; IEEE C37.90.1  |
| Surge immunity tests  | IEC 60255-22-5; IEC 61000-4-5                 |
| Immunity to conducted disturbances induced by radiofrequency fields             | IEC 60255-22-6; IEC 61000-4-6; IEEE C37.90.2  |
| Power frequency magnetic field immunity tests                                   | IEC 60255-22-8; IEC 61000-4-8                 |
| Voltage dips, short interruptions and voltage variations on dc input power port | IEC 60255-11; IEC 61000-4-29                  |
| Electromagnetic emission tests  | CISPR 22; IEC 60255-25                        |
| Vibration tests (sinusoidal)  | IEC 60255-21-1; IEC 60068-2-6                 |
| Shock and bump tests  | IEC 60255-21-2; EN 60068-2-27                 |
| Environmental testing (Cold: -30 °C)  | IEC 60068-2-1                                 |
| Environmental testing (Dry heat: +70 °C)  | IEC 60068-2-2                                 |
| Environmental testing (Temperature cycle: 20-55-20°C, Humidity: 97%)            | IEC 60068-2-3; IEC60068-2-30                  |
| Insulation coordination (Overvoltage category III)                              | IEC 60255-5                                   |
| Emission standard for industrial environments                                   | IEC 61000-6-4                                 |
| Immunity for industrial environments  | IEC 61000-6-2                                 |

## Available extension modules

| Product         | Description  | Order code                    |
|-----------------|--|-------------------------------|
| IC-NT CT-BIO7   | 1 phase current input and binary input/output module | <a href="#">IC-NT-CT-BIO7</a> |
| IG-IOM          | Analog/binary input/output module                    | <a href="#">IG-IOM</a>        |
| IGS-PTM         | Analog/binary input/output module                    | <a href="#">IGS-PTM</a>       |
| IL-NT-AIO       | Analog input/output module                           | <a href="#">IL-NT-AIO</a>     |
| CT2-REL2        | Relay output and analog input module (default)       | <a href="#">CT2-REL2</a>      |
| IL-NT RS232     | Direct connection (PC) by RS232                      | <a href="#">IL-NT-232</a>     |
| IL-NT RS232-485 | Dual Port Extension Board with RS232 and RS485       | <a href="#">IL-NT-232-485</a> |
| IL-NT S-USB     | Service USB Module                                   | <a href="#">IL-NT-S-USB</a>   |
| IB-Lite         | Internet / Ethernet Module including Web Server      | <a href="#">IB-Lite</a>       |
| IL-NT GPRS      | GSM / GPRS Modem Plug-In Module                      | <a href="#">IL-NT-GPRS</a>    |

## Related products

| Product         | Description                          | Order code                  |
|-----------------|--------------------------------------|-----------------------------|
| MainsPro        | Mains Decoupling Relay               | <a href="#">MAINSPRO</a>    |
| IntelliPro SYNC | Synchronization and protection relay | <a href="#">IP1SYNCXBAA</a> |

## Functions and protections

| Standard functions                      |           |   |            |
|---|-----------|---|------------|
| Description                             | ANSI code | Description                                 | ANSI code  |
| Under/overvoltage                       | 27, 59    | Directional/reverse power with time delay   | 51         |
| Positive sequence undervoltage          | 27D       | Breaker failure protection                  | 50BF       |
| Voltage asymmetry                       | 47        | Dynamic grid support                        |            |
| Under/overfrequency                     | 81L, 81H  | QU (Reactive power undervoltage) protection |            |
| Instantaneous overcurrent               | 50        | Phase sequence supervision                  |            |
| Time overcurrent                        | 51        | Auto fault reset                            |            |
| Current asymmetry                       | 46        | Maximum parallel time                       |            |
| Earth fault current                     | 50N, 51N  | Battery voltage protection                  |            |
| Optional functions                      |           |   |            |
| Sync Check                              | 25        | Rate of change of frequency + rocof filter  | 81R        |
| Reverse Power                           | 32        | Ground surge current                        | 50GS, 51GS |
| Time overcurrent with voltage restraint | 51V       | Vector shift                                | 78         |
| Neutral voltage displacement            | 59N       | Pole slip                                   | 78PS       |
| Directional overcurrent                 | 67        | AC-reclosing relay                          | 79         |

## Certificates and standards

|  |                  |             |  |
|--|------------------|-------------|--|
| ▶ IEC 60255  | ▶ VDE V 0126-1-1 | ▶ BDEW      |   |
| ▶ G59/3, G10, G83  | ▶ UL 508         | ▶ IEEE 1547 |  |
| List of standards is available on: <a href="https://webstore.iec.ch/">https://webstore.iec.ch/</a> |                  |             |  |

