


CUBE⁺ HYPER light tower

The special **CUBE⁺ HYPER** version by Generac Mobile® is a lighting tower equipped with the new **Omnia® LED Technology** allowing the operator to point the floodlights in every direction, to provide 360° illumination. Also available with anti-glare floodlights.

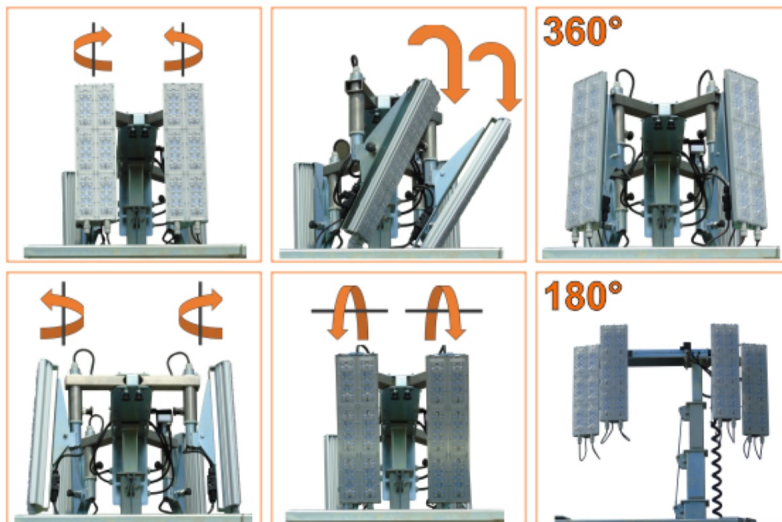

Picture shown may not reflect actual configuration.

GTL01 digital controller

A **digital controller** specifically studied to manage every function of the light tower for the best ease of use.

Top accessibility

5 wide doors for a complete access to the technical area.

Bolted frame

A **bolted frame** for a much better resistance to vibrations, wear and rust. It offers the best reliability and durability in the industry.

Liquid containment tank

A **liquid containment tank** to avoid any risk of leakages on the ground.

Safe locking stabilizers

New adjustable **locking system** embedded in the machine frame. A step forward from competition standard locking system. No more removable external lockers: when CUBE⁺ HYPER doors are locked, it's impossible to change position or even remove the stabilizers.

CUBE ⁺ Hyper Y2	Technical Data
Minimum dimensions (L x W x H)	1220 x 1150 x 2420 mm
Maximum dimensions (L x W x H)	1790 x 1740 x 8400 mm
Dry weight	1070 kg
Lifting system	Hydraulic
Mast rotation	340°
Lamps power	4 x 320 W
Lamps type	LED (Hyper)
Total lumen	184000 Lm
Illuminated area (180°/360°)	4500 m2 / 4200 m2
Engine	Yanmar 2TNV-70
Engine cooling	Liquid
Cylinders (q.ty)	2
Engine speed (50/60 Hz)	1500 / 1800 rpm
Liquid containment (110%)	√
Alternator (kVA/V/Hz)	5/220/50 – 5/240/60
Outlet socket (kVA/V/Hz)	2,5/220/50 – 2,5/240/60
Inlet plug (A/V/Hz)	16/220/50 – 16/240/60
Avg. sound pressure	59 dB(A) @ 7m
Wind speed resistance	80 km/h
Tank capacity	170 l
Running time	243 h



Picture shown may not reflect actual configuration.

AFTER-SALES SERVICE:

daniele.crepaldi@generac.com
fabio.busato@generac.com

SPARE PARTS:

manuela.mariani@generac.com

TUTORIALS:

www.towerlight.com/qr/