


# H 8000 TLX

powered by **HONDA GX390**

## Model H8000TLX Compact



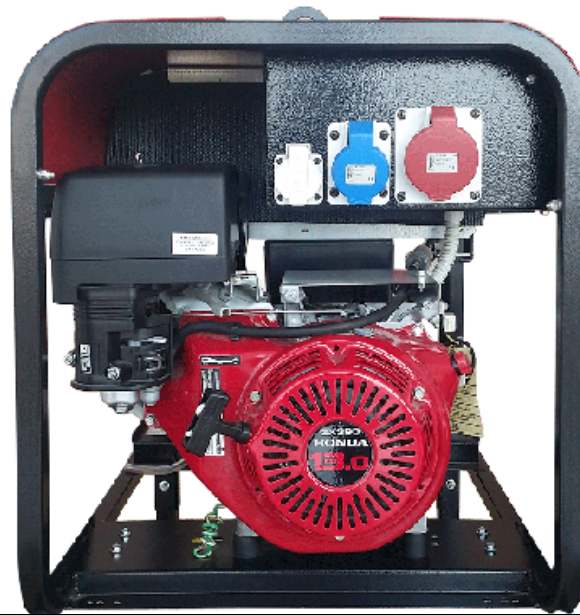


### 1. General Details

Frequency	50 Hz	
Voltage	230 V	
Max Power	<b>7,5</b>	KVA
Continuous power	6,8	KVA
Power factor cos $\phi$	0,8	
Max Power	6,0	KWe
Continuous power	5,4	KWe

### 2. Petrol driven engine

Make and model	<b>HONDA</b>	<b>GX390</b>
rpm	3000	
Max power (at 3600 rpm)	13	HP
Cooling system	Air	
Cylinders	1	
Displacement (cm <sup>3</sup> )	389	

<b>3. Alternator</b>						
Make and model	<b>LINZ</b>	<b>E1S10M H</b>				
Max power	<b>8,7</b>	<b>KVA</b>				
Continuous power	<b>7,9</b>	<b>KVA</b>				
<b>4. Starting system</b>						
Recoil starter						
<b>5. Standard Equipment</b>						
✓ Protection Frame		✓ Air filter				
✓ Vibration dampers		✓ Fuel tank				
✓ Low oil level protection		✓ Output sockets with protection				
✓ Exhaust gas silencer		✓ Electric panel model <b>QM 305</b>				
<b>6. Electric Panels</b>						
<b>QM 305 STANDARD</b>			<b>ACP 0411</b> available for genset with electronic starting system			
 <ul style="list-style-type: none"> <li>✓ Single phase circuit breaker 16A</li> <li>✓ Circuit breaker</li> <li>✓ Voltmeter, Hour counter</li> <li>✓ Hour counter, Voltmeter</li> <li>✓ 16A Three-phase socket 3P</li> <li>✓ 16A Single-phase Schuko socket 3P</li> <li>✓ 16A Single-phase socket 3P</li> </ul>			 <ul style="list-style-type: none"> <li>✓ Control unit</li> <li>✓ Frequency and voltage indicators</li> <li>✓ Generating set/mains supply contractors</li> <li>✓ Automatic battery charger</li> </ul>			
<b>7. Logistic Information</b>						
	<b>Model</b>	<b>Fuel tank (litres)</b>	<b>Weight (Kgs)</b>	<b>Dimensions (cm)</b>		
				<b>L</b>	<b>W</b>	<b>H</b>
	H8000TLX compact	20	95	75	56	62
<b>8. Fuel consumption</b>						
litres/hour at 75% load		1,9	approx			
<b>9. Marking</b>						
Label showing the general data of the genset (voltage, power, frequency). engine model with serial number, alternator model.						
TECNOGEN LOGO						
<b>10. Operating manuals</b>						
English. Other languages available on request.						